

ROOFING AND SIDING ESTIMATE

S#	DWG REF	DETAIL	CSI No	DESCRIPTION	QTY	UNIT	UNIT Lab	UNIT Mat	Total Lab	Total Mat	TOTAL
				General Requirements							
1				SUPERVISION	1	LS	\$4,000.00	\$0.00	\$4,000.00	\$0.00	\$4,000.00
2				SUBMITTALS & SAMPLES	1	LS	\$4,500.00	\$0.00	\$4,500.00	\$0.00	\$4,500.00
3				TEMPORARY FACILITIES & CONTROLS	1	LS	\$3,000.00	\$0.00	\$3,000.00	\$0.00	\$3,000.00
4				PROJECT SCHEDULE	1	LS	\$2,000.00	\$0.00	\$2,000.00	\$0.00	\$2,000.00
5				OFFICE OVERHEADS	1	LS	\$2,000.00	\$0.00	\$2,000.00	\$0.00	\$2,000.00
6				CLOSEOUT PROCEDURES	1	LS	\$3,000.00	\$0.00	\$3,000.00	\$0.00	\$3,000.00
				Subtotal					\$18,500		\$18,500
				Shingle roofing							
7	A1.1			Shingle roofing as:	2550	SF	\$3.80	\$5.70	\$9,690.00	\$14,535.00	\$24,225.00
8	A1.1			Ridge vent	50	LF	\$1.20	\$1.80	\$60.00	\$90.00	\$150.00
9	A1.1			6"x6" "K" Style aluminum gutters	155	LF	\$6.60	\$9.80	\$1,023.00	\$1,519.00	\$2,542.00
10	A1.1	A1.3		4"x5" Aluminum downspouts	44	LF	\$4.80	\$7.20	\$211.20	\$316.80	\$528.00
				Flat roof							
11	A1.1			Flat roof as:	505	SF	\$4.70	\$7.20	\$2,373.50	\$3,636.00	\$6,009.50
12	A1.3	9/A1.3		EPDM roof membrane at wall	182	SF	\$1.40	\$2.10	\$254.80	\$382.20	\$637.00
13	A1.1			4'x4' roof hatch	1	EA	\$55.00	\$285.00	\$55.00	\$285.00	\$340.00
14	A1.1			Roof drain flashing	2	EA	\$22.00	\$33.00	\$44.00	\$66.00	\$110.00
15	A1.3	9/A1.3		Steel pipe roof guardrail	56	LF	\$26.00	\$38.00	\$1,456.00	\$2,128.00	\$3,584.00
				Exterior soffit							
16	A1.1	A1.4		Fiber cement soffit board w/ exterior grade plywood	940	SF	\$1.00	\$1.50	\$940.00	\$1,410.00	\$2,350.00
17	A1.1			1x2 Fiber cement batten at soffit	12	LF	\$1.20	\$1.80	\$14.40	\$21.60	\$36.00
				Siding							
18	A1.3	A1.4		Exterior lap siding as:	1320	SF	\$4.40	\$6.60	\$5,808.00	\$8,712.00	\$14,520.00
19	A1.3	A1.4		Fiber cement vertical siding w/ weather barrier and 3/4"	250	SF	\$2.60	\$3.90	\$650.00	\$975.00	\$1,625.00
20	A1.3	A1.4		1x6 Fiber cement trim	136	LF	\$1.00	\$1.50	\$136.00	\$204.00	\$340.00
21	A1.3	A1.4		1x4 Fiber cement trim	160	LF	\$0.80	\$1.20	\$128.00	\$192.00	\$320.00
22	A1.3	A1.4		5/4x6 Fiber cement trim	192	LF	\$0.88	\$1.32	\$168.96	\$253.44	\$422.40
23	A1.3	A1.4		5/4x8 Fiber cement trim/fascia	370	LF	\$0.88	\$1.32	\$325.60	\$488.40	\$814.00
24	A1.3	A1.4		1x3 Fiber cement batten	50	LF	\$0.90	\$1.00	\$45.00	\$50.00	\$95.00
25	A1.3	A1.4		5/4" Composite column cladding	106	SF	\$1.40	\$3.40	\$148.40	\$360.40	\$508.80
				Subtotal					\$23,532	\$35,625	\$59,157
				TOTAL							\$77,657
				PROFIT	35%						\$27,180
				BASE BID							\$104,837

AIR 101 30000000

PERSONALITY

FLOOR PLAN 5


CONTAINER NUMBER
18M004

SERIAL NUMBER
00-0000-00

MC 1011 07 0 0 0 79 (00000000)


PAVCEC

A.I.I

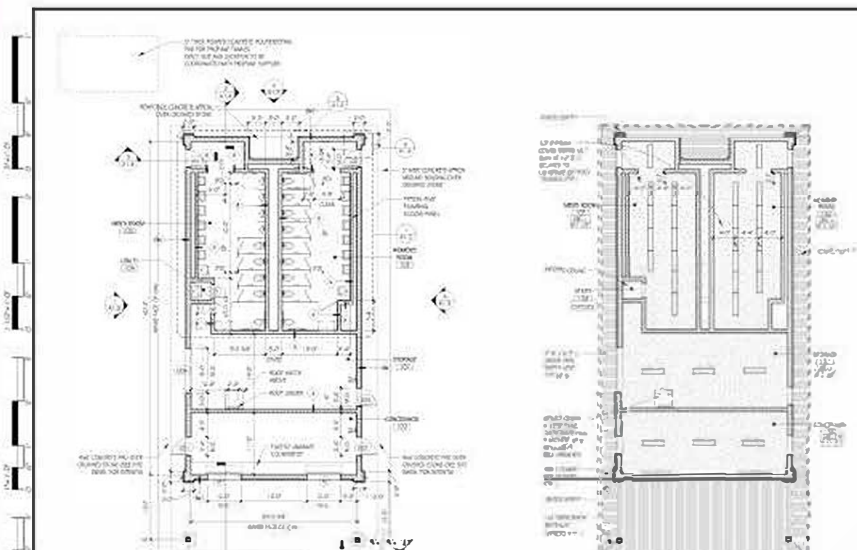


① FIRST FLOOR PLAN

② REFLECTED CEILING PLAN

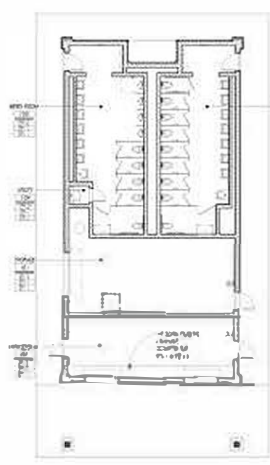

⑦ FINISH PLAN

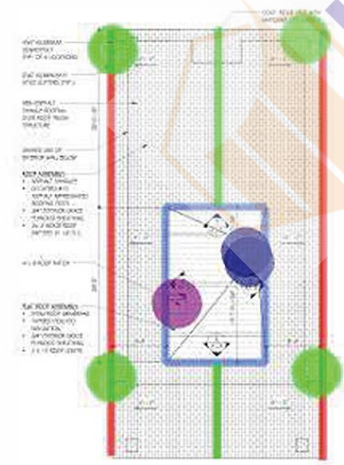

AS - ROOF PLAN

CEILING NOTES

17.7 - REDO AFTER REVEALING

[illegible]

GENERAL FINISH NOTES

[illegible]

GENERAL ROOFING NOTES

THE UNIVERSITY OF CHICAGO PRESS

[illegible]

PLAN LEGEND

————— HISTORIC PICTURE AND ARTISTS' STORY

PROFESSOR CAROL L. JEFFREY, M.D., M.P.H.
 ASSISTANT DEAN FOR RESEARCH
 UNIVERSITY OF CALIFORNIA
 SAN FRANCISCO, CALIFORNIA

GENERAL NOTES

[illegible]

U.S. AIR FORCE

100

[illegible]

100



MERCER COUNTY
PARK COMMISSION

-  Flat roof perimeter
-  Roof drain flashing
-  roof hatch
-  ridge vent
-  gutter
-  downspouts

92.3 FT 


2.0 

1.0 


49.5 FT 

154.6 FT 

4.0 

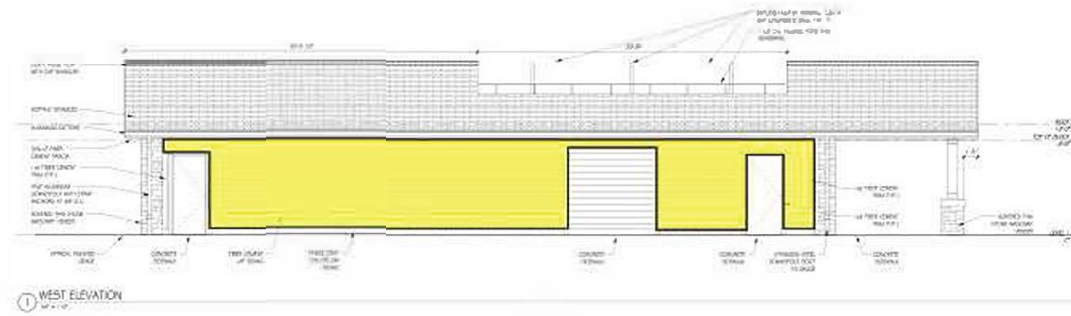


1 WEST ELEVATION
10' x 10'

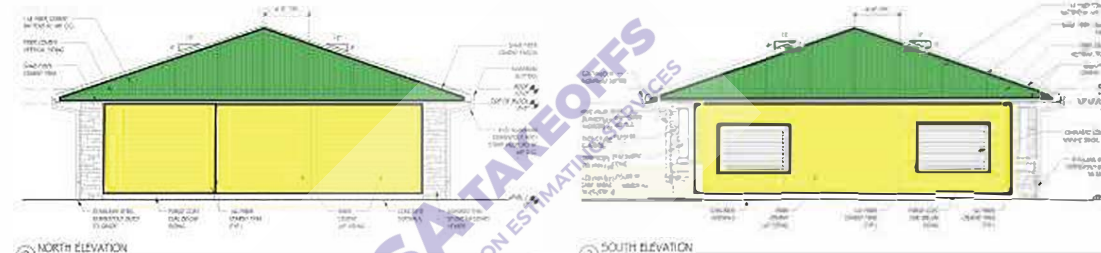

2 NORTH ELEVATION
10' x 10'



3 SOUTH ELEVATION
10' x 10'



1,247.3 SQ FT
239.7 SQ FT
181.2 SQ FT


lap siding
vertical siding
Roof membrane on wall




6 ROOF WELL WALL ELEVATION
10' x 10'



7 ROOF WELL WALL ELEVATION
10' x 10'



8 ROOF WELL WALL ELEVATION
10' x 10'




5 ROOF WELL WALL ELEVATION
10' x 10'


spiegle



EXTERIOR ELEVATIONS
18M004
A1.3

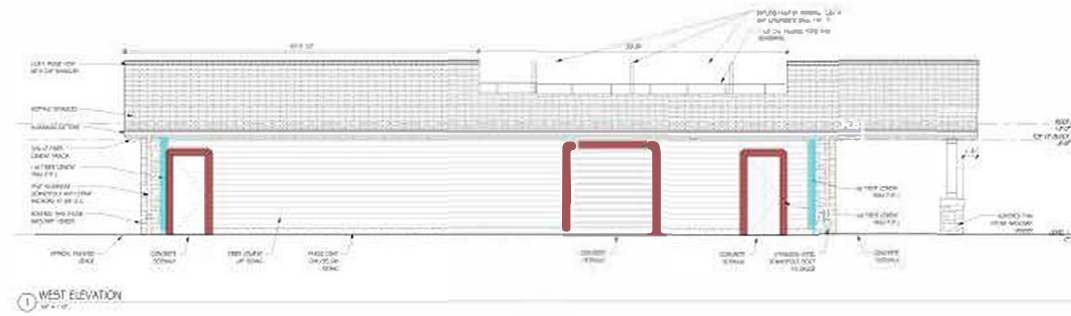


1 WEST ELEVATION
1/4" = 1'-0"

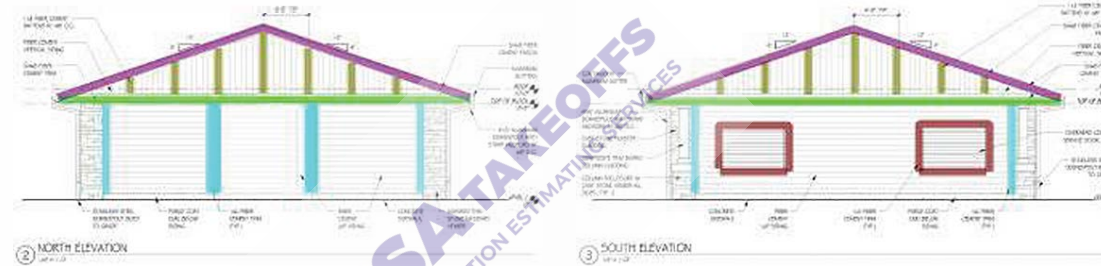


2 NORTH ELEVATION
1/4" = 1'-0"

USA TALENTS
CONSTRUCTION ESTIMATING SERVICES

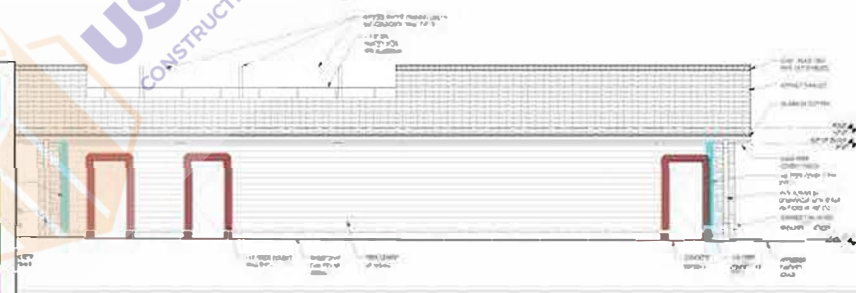


3 SOUTH ELEVATION
1/4" = 1'-0"


	1x6 trim	129.8 FT
	1x4 trim	158.7 FT
	1x3 batten	46.2 FT
	5/4x8 trim	74.6 FT
	fascia	78.7 FT
	5/4" Composite trim fascia	94.4 FT




6 ROOF WELL WALL ELEVATION
1/4" = 1'-0"



7 ROOF WELL WALL ELEVATION
1/4" = 1'-0"

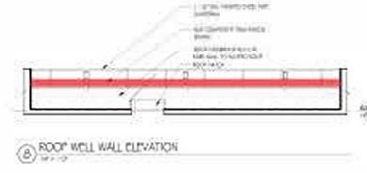

8 ROOF WELL WALL ELEVATION
1/4" = 1'-0"

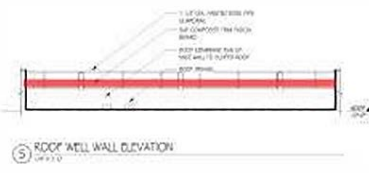

5 ROOF WELL WALL ELEVATION
1/4" = 1'-0"

spiegle

SPITZER ARCHITECTS, PLLC, PROJECT NO. 1800004
1800004 EXTERIOR ELEVATIONS
DATE: 08/08/20
PROJECT: 1800004
SHEET: 08/08/20



EXTERIOR ELEVATIONS

1800004

08/08/20

A1.3